




# BLScoreBug Lite

## Cost-Effective Portable ScoreBug Solution for Broadcast Sports

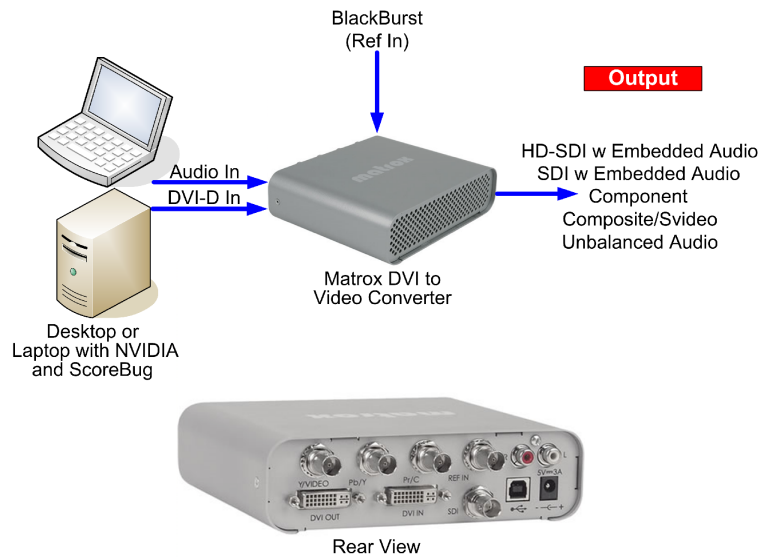

### Features

- Uses industry standard DVI-D output from NVIDIA GT, GTX or FX Series graphics cards on Windows 7 or Windows XP laptop or desktop systems.
- Supports NTSC, PAL, NTSC-EIAJ, 1080i, 720p with 4 channels of SDI embedded audio 24-bit, 48 kHz. Compliant with SMPTE 292M, SMPTE 299M
- Component, S-Video and Composite output.
- SD analog black burst (bi-level) or HD tri-level sync (75  $\Omega$ ), terminated. Timing offset controls are provided.
- Digital or Analog video output can be tied into the luminance keyer of most broadcast switchers.
- Available Sports; Baseball, Basketball, Curling, Football, Hockey, Lacrosse, Rugby, Soccer and Tennis .

### Benefits

- Cost-effective, BLScoreBug Lite is a complete portable Broadcast ScoreBug solution for less than \$10K USD.
- Setup takes less than 5 minutes.
- Matrox Convert DVI will output full resolution 1080i HD video or you can choose to downscale to 720p or SD. Conversion of the HD color space to the SD color space and aspect ratio conversion to anamorphic, letterbox and center cut are provided.

For more information on BLScoreBug Lite, contact us at [sales@blsoft.ca](mailto:sales@blsoft.ca)